
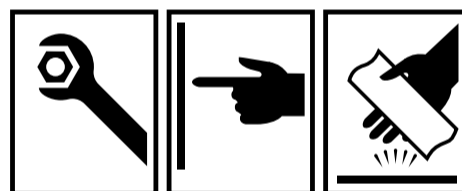


Ordering spares / Ersatzteil - Regelung / Pièces de rechange / Parti di ricambio / Lista de recambios / Onderdelen bestellen (NL/B) / Κωδικοί Ανταλλακτικών / Bestilling af reservedele / Beställning av reservdelar / Bestilling av reservedeler / Резервни части / Запчасти / Części zapasowe / Piese de schimb / Rendelhető alkatrészek / Запасні частини / Резервни делови / Резервни делови / Atsarginių dalių / Tellitavad varuosad / Rezerves daļas / Náhradní díly / Náhradné diely / Yedek parça siparişi / Nadomestni deli

XX = AA, AD,

- 1 - B E223 XX
- 1a - B E220 XX
- 2 - A 861562 XX
- 3 - B E217 XX
- 4 - B E175 XX
- 5 - B 961890 XX
- 6 - B 961798 XX
- 6a - B 962009 XX
- 6b - B 962008 NU
- 6c - B 962010 NU
- 6d - B 962011 NU
- 7 - B 962015 XX

P bar	MAX. 10 0,5	5 	Q (3 bar)
T °C	MAX. 80	65 55 	l/min 8 12

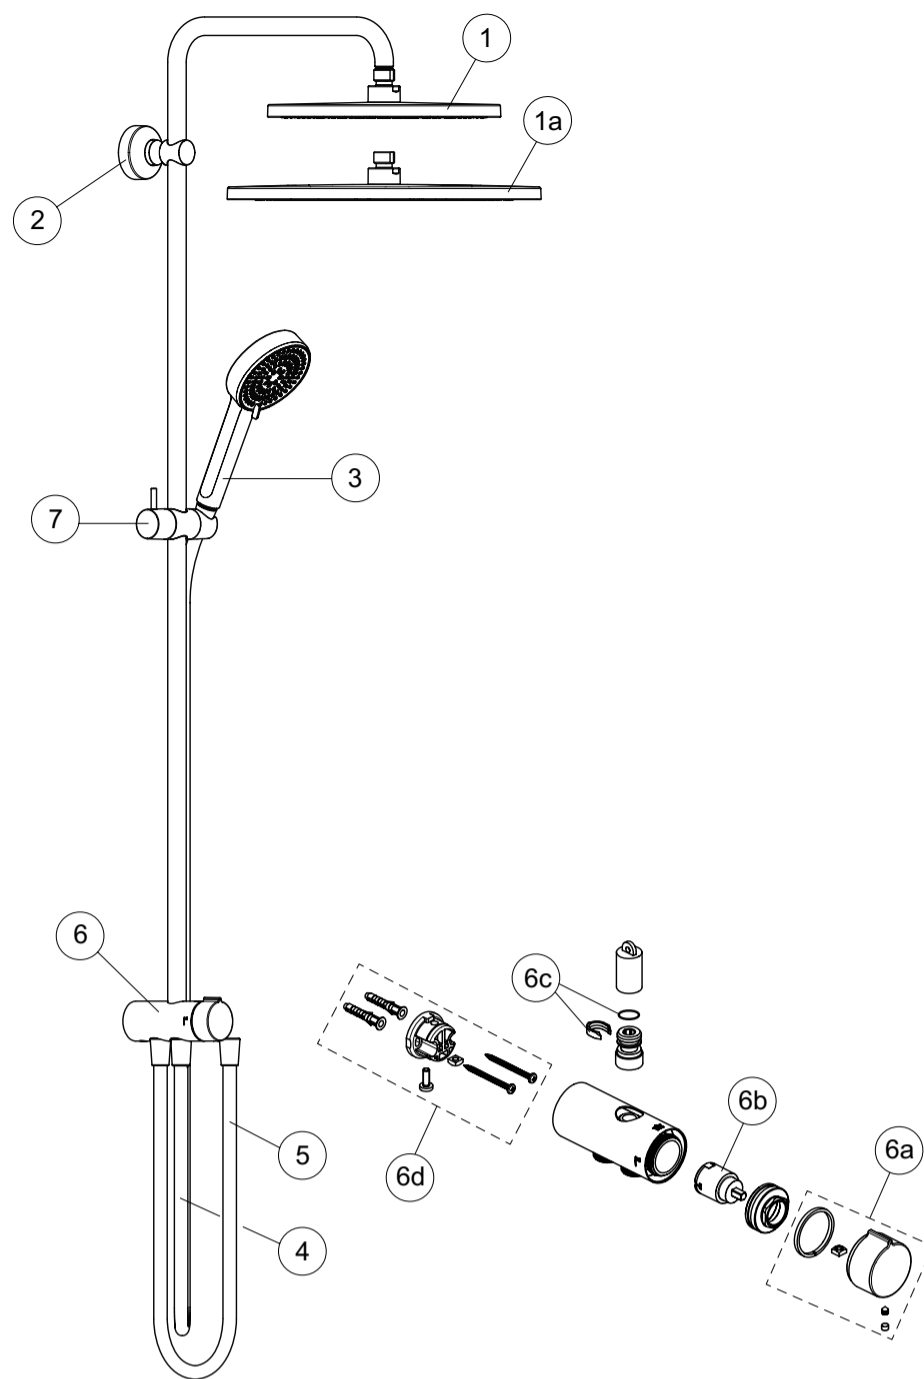





Ideal Standard

CERATWIST T25


05.2025 / B565484







B E229 XX
B E230 XX

T MAX < 70°C

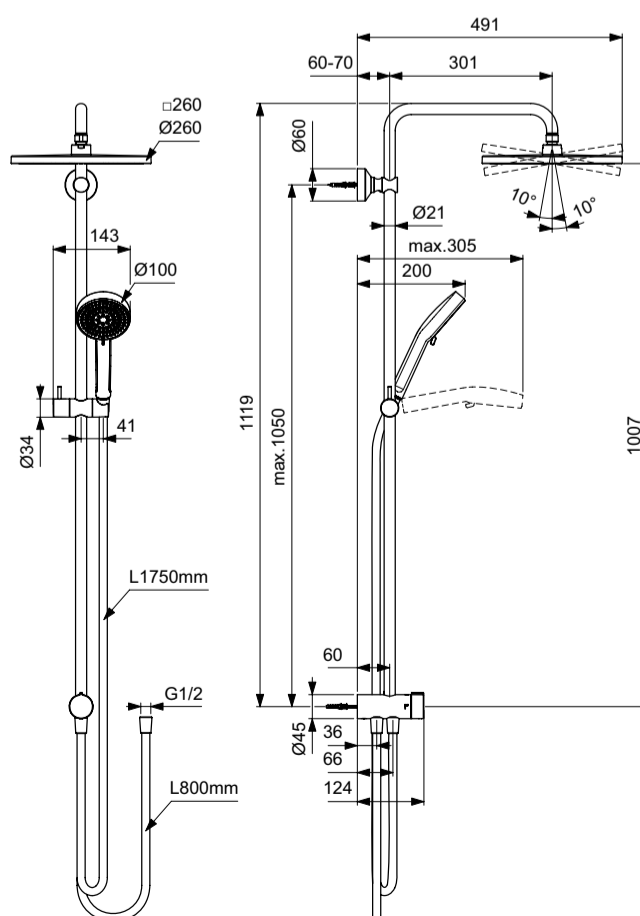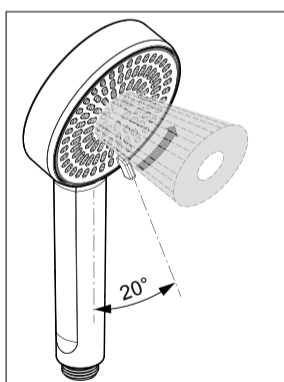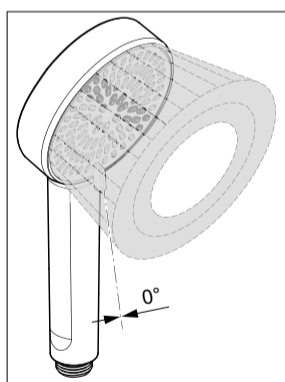

Ideal Standard International NV
Corporate Village – Gent Building
Da Vincilaan 2
1935 Zaventem
Belgium
<https://www.idealstandard.com>




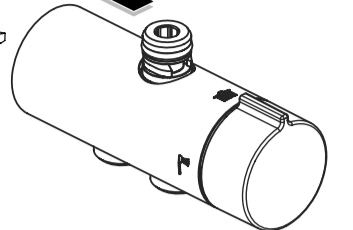

max. 1050mm.

3


4



5

6


8

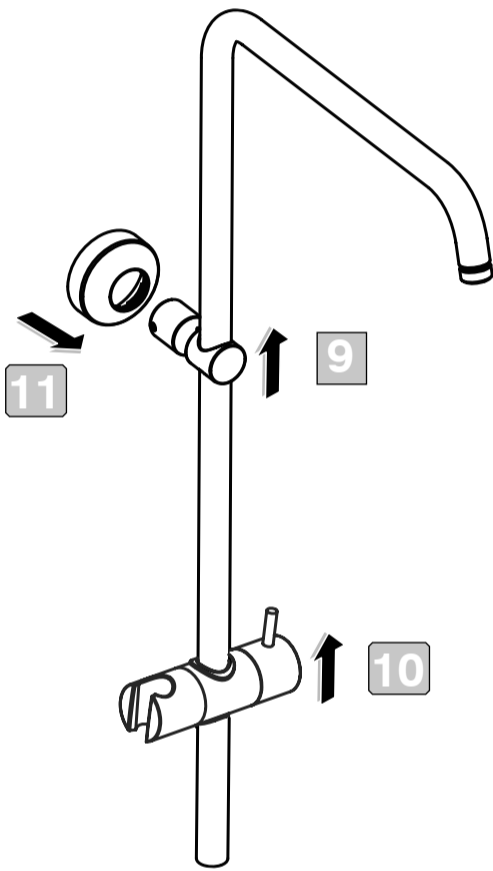


11

9

10

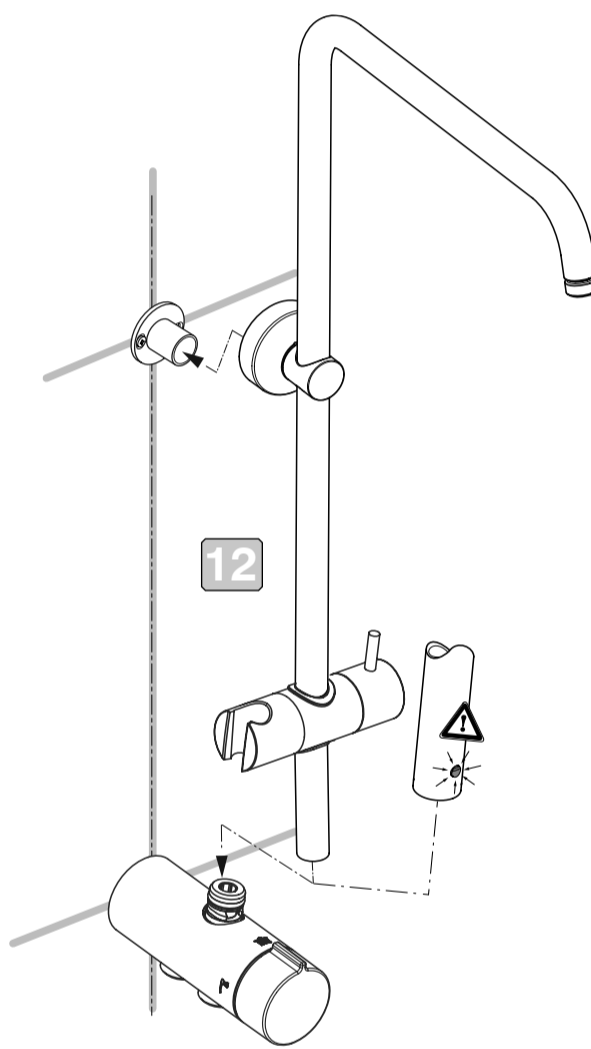


12

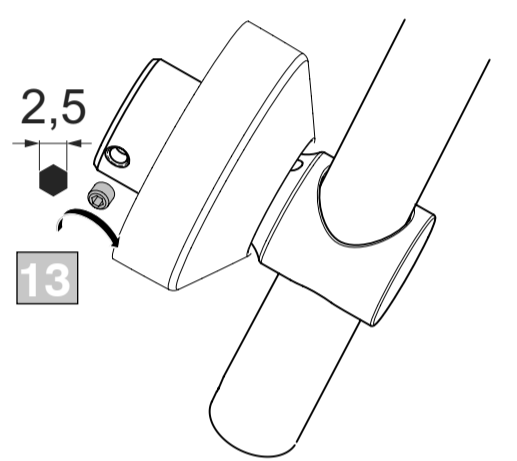


13

2,5

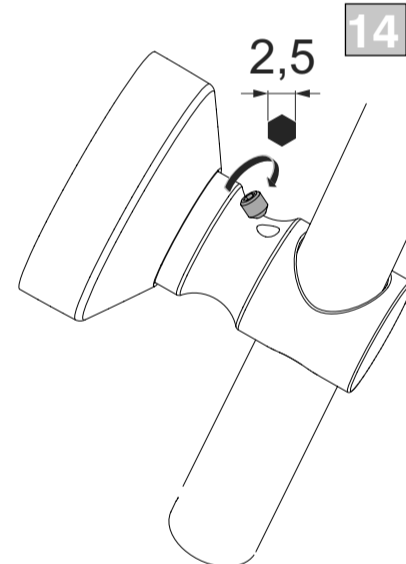

14

2,5





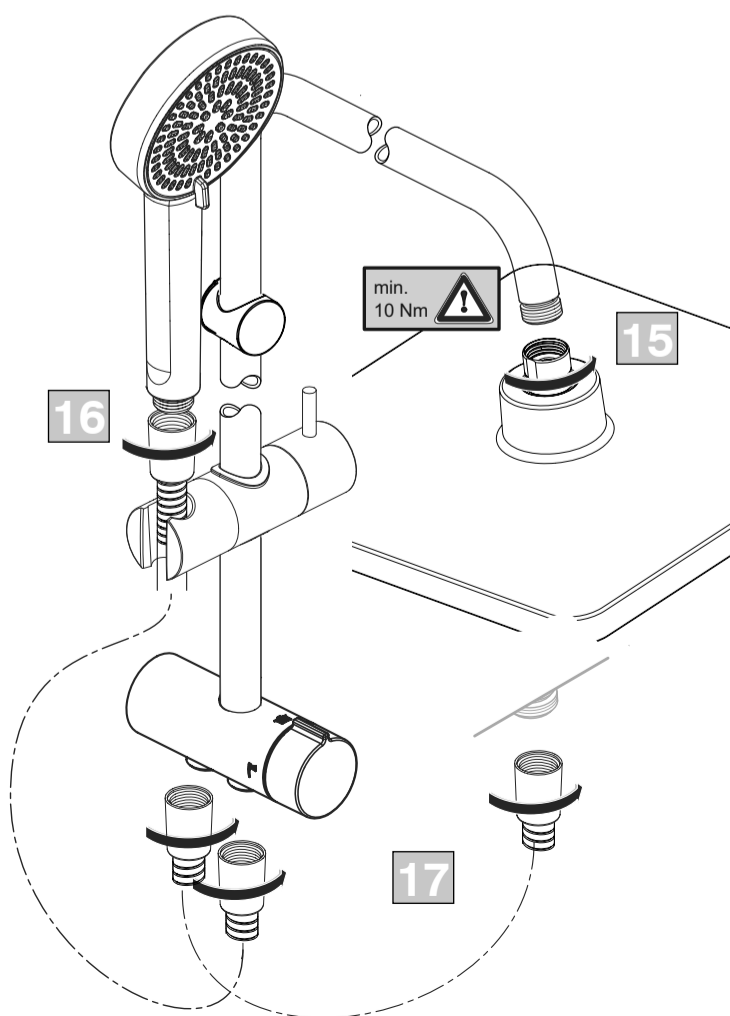


min. 10 Nm

15


16

17

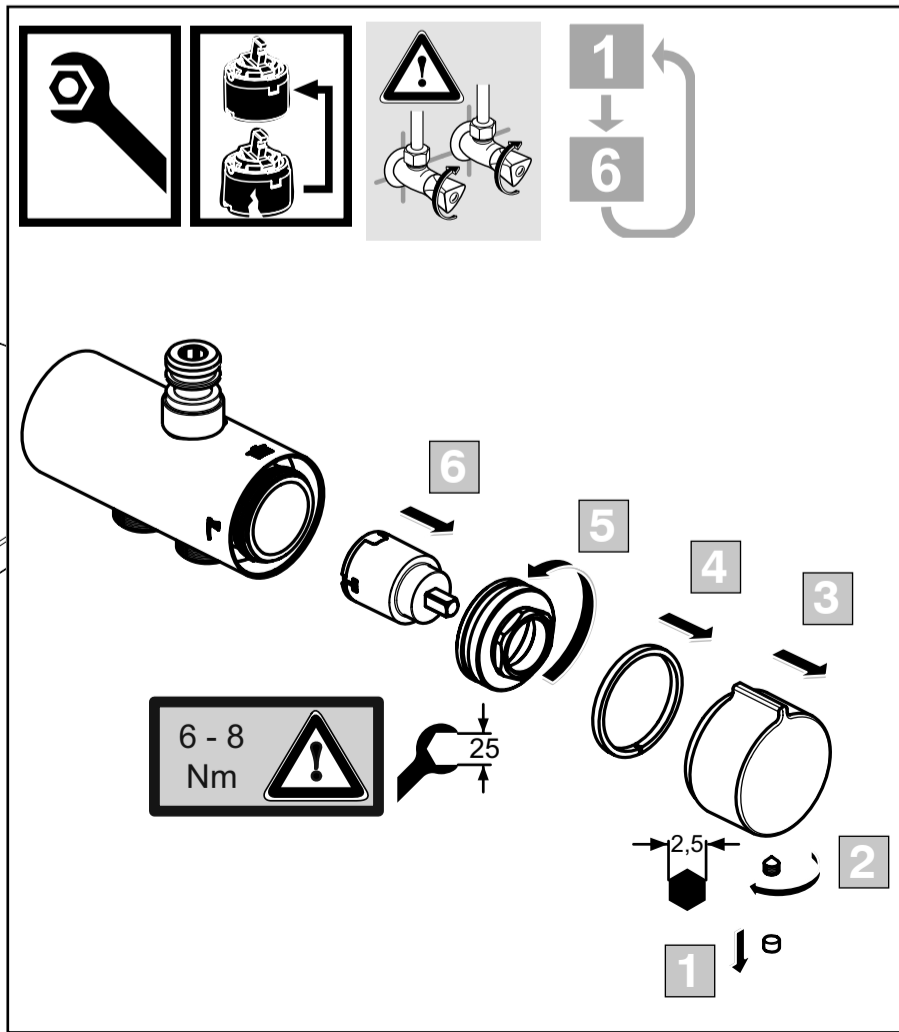

1

6




6

5

4

3

6 - 8 Nm



25

2,5

1

2

