

- besteht aus: 3-Loch Waschtischarmatur, Ablaufgarnitur
- ComfortZone: 150
- Ausladung: 112 mm
- Auslauflhöhe: 104 mm
- Griffvariante: Hebelgriff
- maximale Durchflussmenge bei 3 bar: 5 l/min
- Keramikventile heiß/kalt 90°
- für Durchlauferhitzer geeignet
- Zugstangen-Ablaufgarnitur G 1 ¼
- Material Ablaufgarnitur: Metall
- Anschlussart: G ¾ Anschlussschläuche
- Anschlussgröße: DN15
- EU-Taxonomie: max. 6 l/min - wesentlicher Beitrag (SC) möglich

Technical drawing of the 3000 Series Double Sink with Faucet, showing front and top views with dimensions.

Front View Dimensions:

- Overall width: 126
- Distance between faucet centers: 112
- Distance from left faucet center to left edge: 72
- Distance from right faucet center to right edge: 104
- Overall height: 127
- Distance from top of sink to faucet handle: 68
- Distance from faucet handle to faucet body: 76
- Distance from faucet body to faucet base: 26
- Distance from faucet base to faucet outlet: 35 (max.)
- Distance from faucet outlet to faucet base: 430
- Distance from faucet base to faucet outlet: 200
- Distance from faucet base to faucet outlet: 200

Top View Dimensions:

- Distance between faucet centers: 112
- Distance from left faucet center to left edge: 72
- Distance from right faucet center to right edge: 104
- Distance from faucet center to faucet base: 76
- Distance from faucet base to faucet outlet: 26
- Distance from faucet outlet to faucet base: 35 (max.)
- Distance from faucet base to faucet outlet: 430
- Distance from faucet base to faucet outlet: 200

Other Dimensions:

- Distance from faucet center to faucet base: 76
- Distance from faucet base to faucet outlet: 26
- Distance from faucet outlet to faucet base: 35 (max.)
- Distance from faucet base to faucet outlet: 430
- Distance from faucet base to faucet outlet: 200


Notes:

- Ø52: Faucet body diameter
- Ø28: Faucet base diameter
- Ø32: Faucet outlet diameter
- G 1/2: Faucet outlet thread
- G 3/8: Faucet base thread
- Ø30: Faucet base hole diameter
- Ø34: Faucet outlet hole diameter

Comfort Zone	EcoRight	EcoSmart	AirPower	Quick Clean
--	---	--	--	---

Marke	hansgrohe
Artikelname	Talis E 3-Loch Waschtischarmatur mit Zugstangen-Ablaufgarnitur
Art.-Nr.	71733140
Oberfläche	Brushed Bronze
Netto Preis	506,60 EUR


Durchflussdiagramm

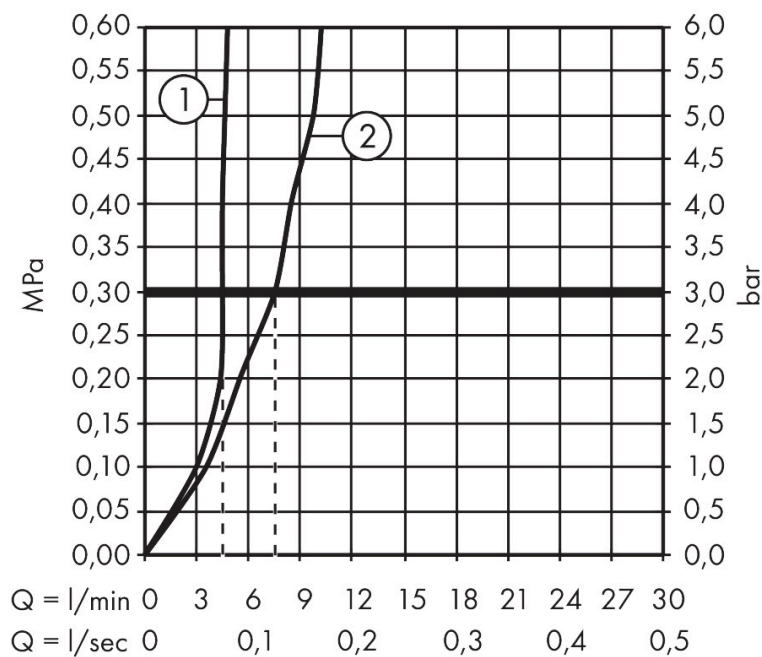

- 1 Mit Durchflussbegrenzer
- 2 Ohne Durchflussbegrenzer

Marke	hansgrohe
Artikelname	Talis E 3-Loch Waschtischarmatur mit Zugstangen-Ablaufgarnitur
Art.-Nr.	71733140
Oberfläche	Brushed Bronze
Netto Preis	506,60 EUR

Explosionszeichnung für Baujahr: > 07/19

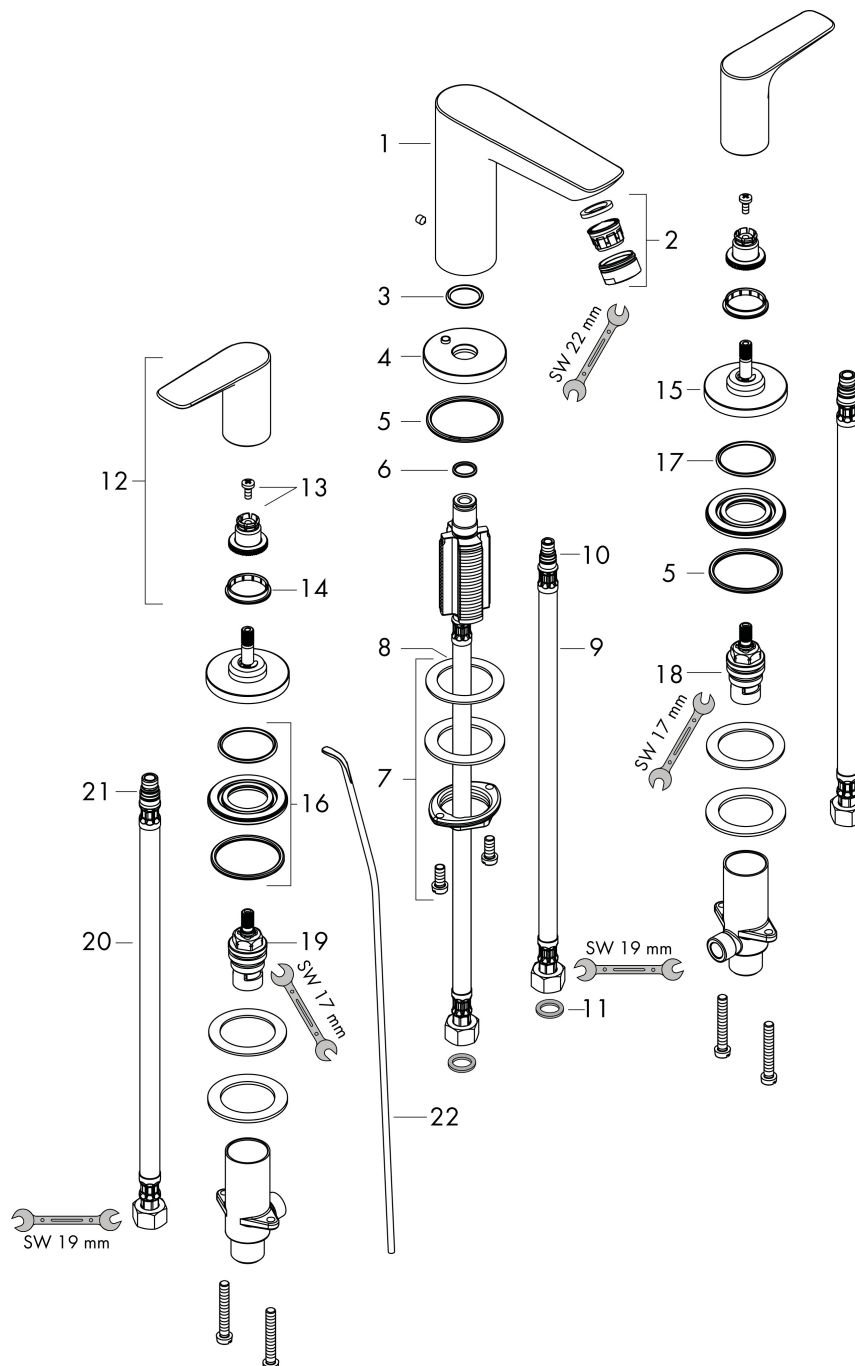

Marke hansgrohe
 Artikelname **Talis E** 3-Loch Waschtischarmatur mit Zugstangen-Ablaufgarnitur
 Art.-Nr. 71733140
 Oberfläche Brushed Bronze
 Netto Preis 506,60 EUR

Ersatzteilliste für Baujahr: > 07/19

Pos.	Beschreibung	Art.nr.	Preis
1	Auslauf kpl.	92785140	160,70
2	Luftsprudler M24x1 (5 l/min)	13185140	24,00
3	O-Ring 18x2,5	98139000	3,20
4	Rosette Ø 53 mm	95272140	74,10
5	O-Ring 40x3	92634000	3,20
6	O-Ring 11x2	98127000	3,20
7	Schaftbefestigung kpl. (Ø 32)	13961000	20,50
8	Gleitring	97548000	3,20
9	Anschlussschlauch 450 mm M8x0,75 G3/8	97206000	25,00
10	O-Ring 7x1,5	98422000	3,20
11	Dichtungsset	95581000	5,60
12	Griff	92779140	74,10
13	Schnappeinsatz mit Schraube	94184000	5,60
14	Farbring-Set, Kalt / Warm	95819000	11,30
15	Rosette Ø 52 mm	97285140	58,70
16	Mutter	92854000	16,90
17	O-Ring 32x2,5	96364000	20,50
18	Absperreinheit links schließend	94008000	31,80
19	Absperreinheit rechts schließend	94009000	31,80
20	Anschlussschlauch 450 mm M10x1 G3/8	96507000	31,80
21	O-Ring 8x1,75	97827000	3,20
22	Zugstange	96657000	11,30
a	Ablaufventil	94139140	129,60
b	Schaftverlängerung 35 mm	13898000	60,90