





DIN EN 806
DIN EN 1717
DIN 1988
Global Standards




°C / °F

max. 70 °C / 158 °F

✓ 60 °C / 140 °F

min. 10 °C / 50 °F


✓ 3 bar / 43,5 psi




min. 1 bar / 14,5 psi



max. 10 bar / 145 psi

3 min.




max. 70 °C / 158 °F



- Ⓓ Montage- und Bedienanleitung
- ⒸN 安裝及操作指南
- ⒸZ Návod k instalaci a k použití
- Ⓔ Instrucciones de montaje y de manejo
- ⒺST Paigaldamine ja kasutamine
- Ⓔ Instructions de montage et d'utilisation
- ⒺGB Installation and operating instructions
- ⒺGR ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ ΚΑΙ ΣΥΝΤΗΡΗΣΗΣ
- ⒺH Szerelési és használati utasítás
- ⒺI Istruzioni di montaggio e per l'uso
- ⒺLT Montavimo ir naudojimo instrukcija
- ⒺLV Montāžas un lietošanas instrukcija
- ⒺNL Montagehandleiding en Gebruiksaanwijzing
- ⒺPL Instrukcja montażu i obsługi
- ⒺRO Instrucțiuni de montaj și utilizare
- ⒺRUS Руководство по монтажу и эксплуатации
- ⒺSK Návod na montáž a obsluhu
- ⒺSLO Navodila za montažo in uporabo
- ⒺUA Інструкція по монтажу та експлуатації
- ⒺUAE تعليمات التركيب والتشغيل

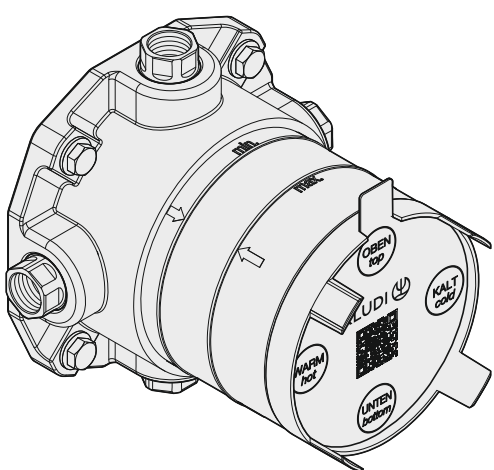



9 62 825/01






Kludi GmbH & Co. KG
Postfach 25 60
D-58685 Menden
Am Vogelsang 31-33
D-58706 Menden


Telefon: (D) +49 (0) 23 73 / 904-0
Telefax: (D) +49 (0) 23 73 / 904-4 65
E-Mail: info@kludi.de
Internet: www.kludi.com




✂ Montageschablone

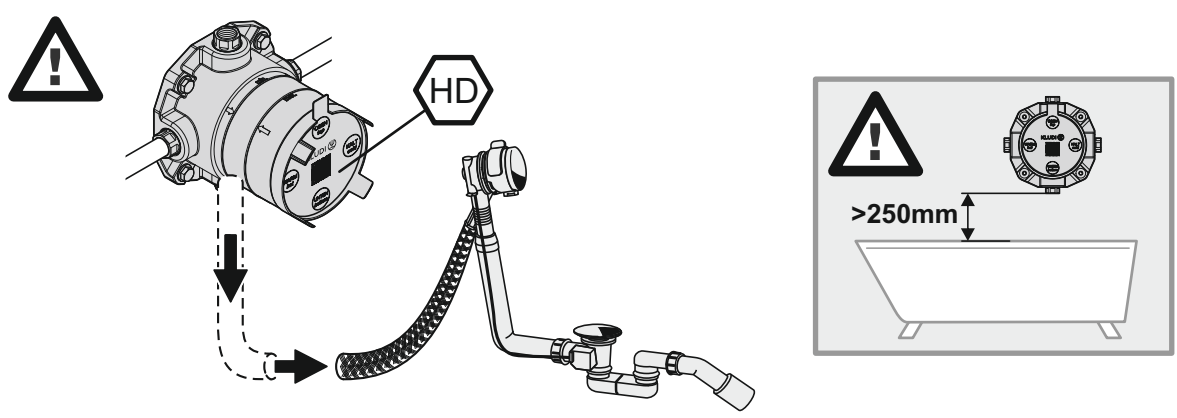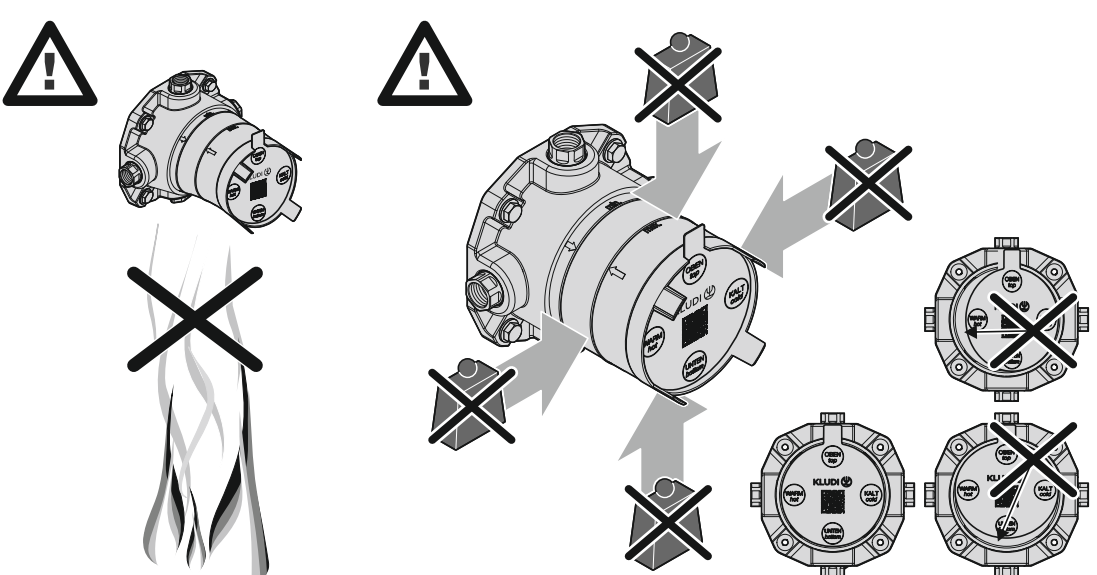


KLUDI Serien				
				
HD xx763xx	xx759xx	xx755xx	xx810xx	xx885xx
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●
●	●	●	●	●

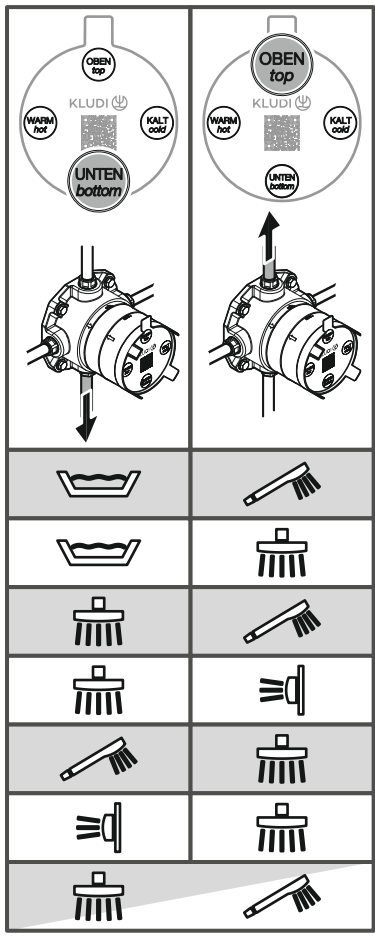

1.

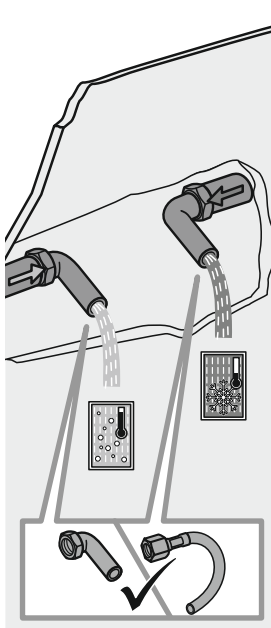

2.

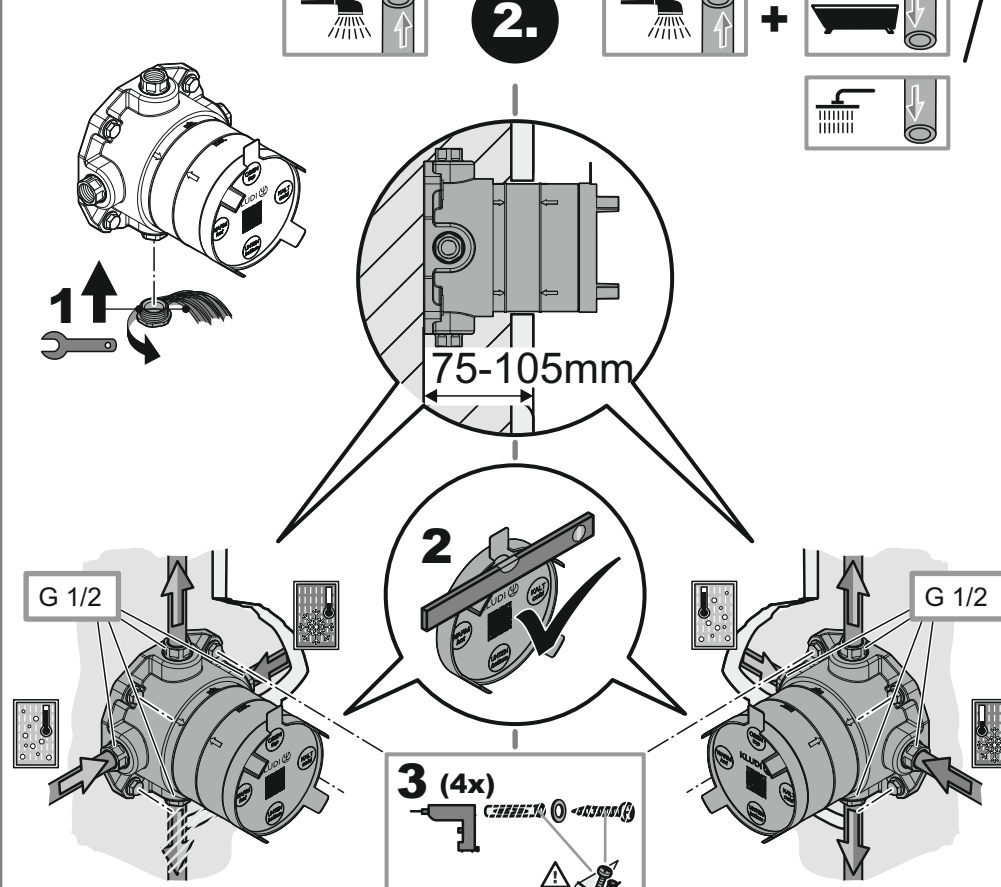


75-105mm


G 1/2

3 (4x)

2.

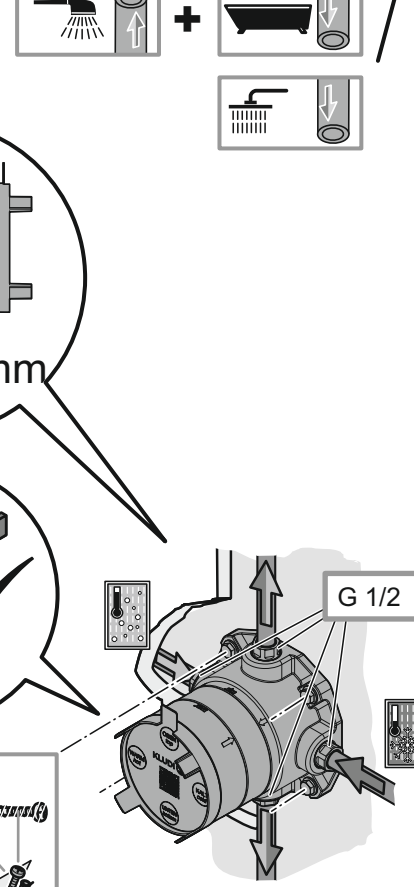

✂ Montageschablone

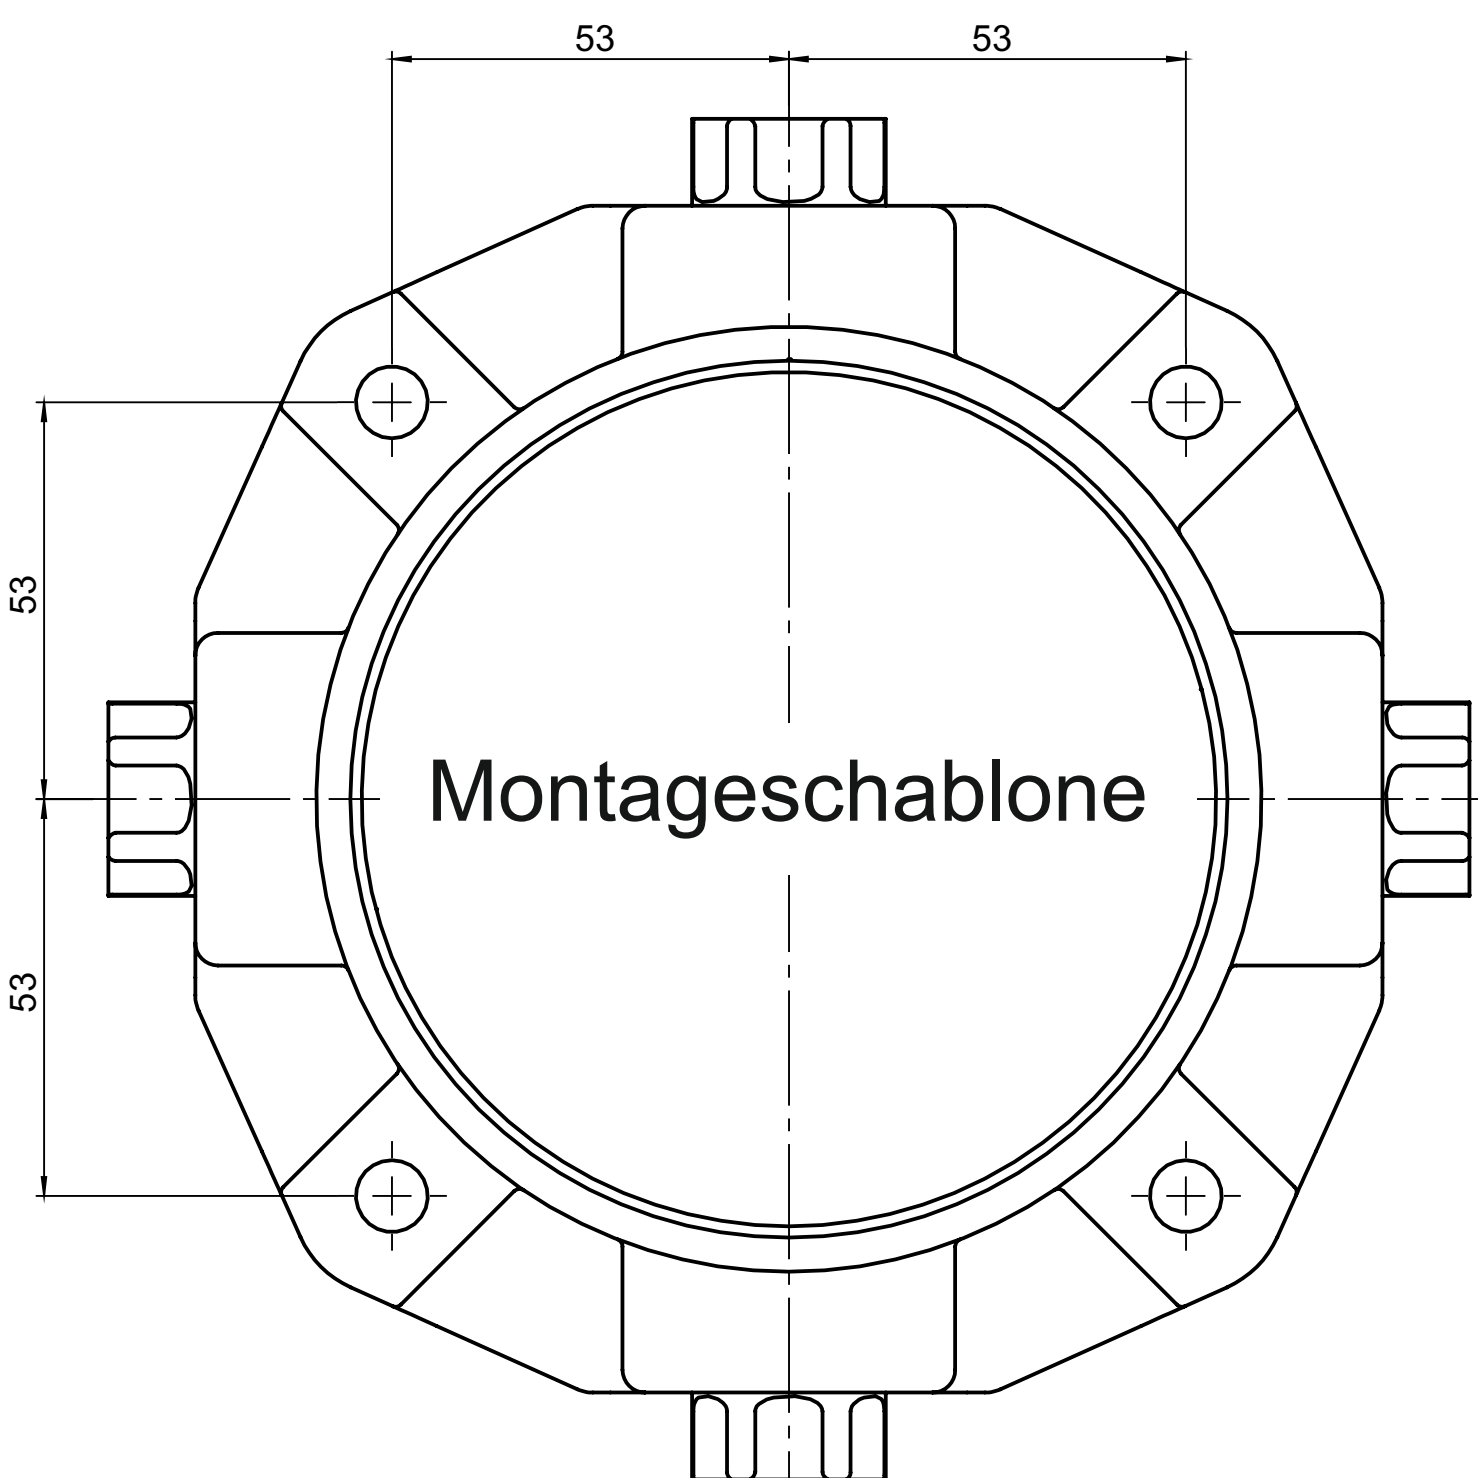

✂ Montageschablone

