

Produktbild



- besteht aus: Einsebel-Küchenmischer, Schlauchbox, Filterkopf, Mineralisierungskartusche Harmony mit Filter
- ComfortZone 210
- Schwenkbereich einstellbar in 3 Stufen auf 60°, 110° oder 150°
- Laminarstrahl
- maximale Durchflussmenge bei 3 bar: 6,5 l/min
- Keramikmischsystem
- Anschlussart: G $\frac{3}{8}$ Anschlussschläuche
- Rückflussverhinderer integriert
- für Durchlauferhitzer geeignet
- sBox für eine leise, leichtgängige und geschützte Schlauchführung im Unterschrank
- Auszugslänge bis zu 76 cm
- Hahnlochbohrung mit 35 mm erforderlich
- getrennte Wasserführung für gefiltertes und ungefiltertes Wasser
- gefiltertes stilles Trinkwasser über Drucktaste am Auslauf
- Filterkapazität: 300 l
- Filteranschluss: G $\frac{3}{8}$ Eingang und Ausgang
- maximale Entnahmemenge (gefiltertes Wasser): 1,3 l/min

Technical drawing of the 3000 Series Gas Valve, showing side and front views with dimensions.

Side View Dimensions:

- Top horizontal distance: 240
- Distance from top to valve body: 215
- Maximum height of the valve body: max. 760
- Angle of the valve body: 5°
- Distance from the top of the valve body to the center of the gas inlet: 6
- Distance from the top of the valve body to the center of the gas outlet: 190
- Distance from the top of the valve body to the center of the gas inlet: 815
- Maximum height of the valve body: max. 70
- Distance from the top of the valve body to the center of the gas inlet: 395
- Distance from the top of the valve body to the center of the gas outlet: 210
- Distance from the top of the valve body to the center of the gas inlet: 45
- Distance from the top of the valve body to the center of the gas outlet: 95
- Distance from the top of the valve body to the center of the gas inlet: 34
- Distance from the top of the valve body to the center of the gas outlet: 43
- Distance from the top of the valve body to the center of the gas inlet: 700
- Distance from the top of the valve body to the center of the gas outlet: 35
- Distance from the top of the valve body to the center of the gas inlet: 47
- Distance from the top of the valve body to the center of the gas outlet: 50
- Distance from the top of the valve body to the center of the gas inlet: 255
- Distance from the top of the valve body to the center of the gas outlet: 323
- Distance from the top of the valve body to the center of the gas inlet: 158
- Distance from the top of the valve body to the center of the gas outlet: 250
- Distance from the top of the valve body to the center of the gas inlet: 29

Front View Dimensions:

- Distance from the top of the valve body to the center of the gas inlet: 34
- Distance from the top of the valve body to the center of the gas outlet: 43
- Distance from the top of the valve body to the center of the gas inlet: 700
- Distance from the top of the valve body to the center of the gas outlet: 35
- Distance from the top of the valve body to the center of the gas inlet: 47
- Distance from the top of the valve body to the center of the gas outlet: 50
- Distance from the top of the valve body to the center of the gas inlet: 255
- Distance from the top of the valve body to the center of the gas outlet: 323
- Distance from the top of the valve body to the center of the gas inlet: 158
- Distance from the top of the valve body to the center of the gas outlet: 250
- Distance from the top of the valve body to the center of the gas inlet: 29

Push

Two Outlets

sBox Kitchen


Pull-out

Quick Clean

Laminar
Spray

Marke	hansgrohe
Artikelname	Aqittura M91 FilterSystem 210, Ausziehauslauf, 1jet, sBox, Starter Set
Art.-Nr.	76800670
Oberfläche	Mattschwarz
Netto Preis	972,10 EUR

Explosionszeichnung für Baujahr: > 03/22

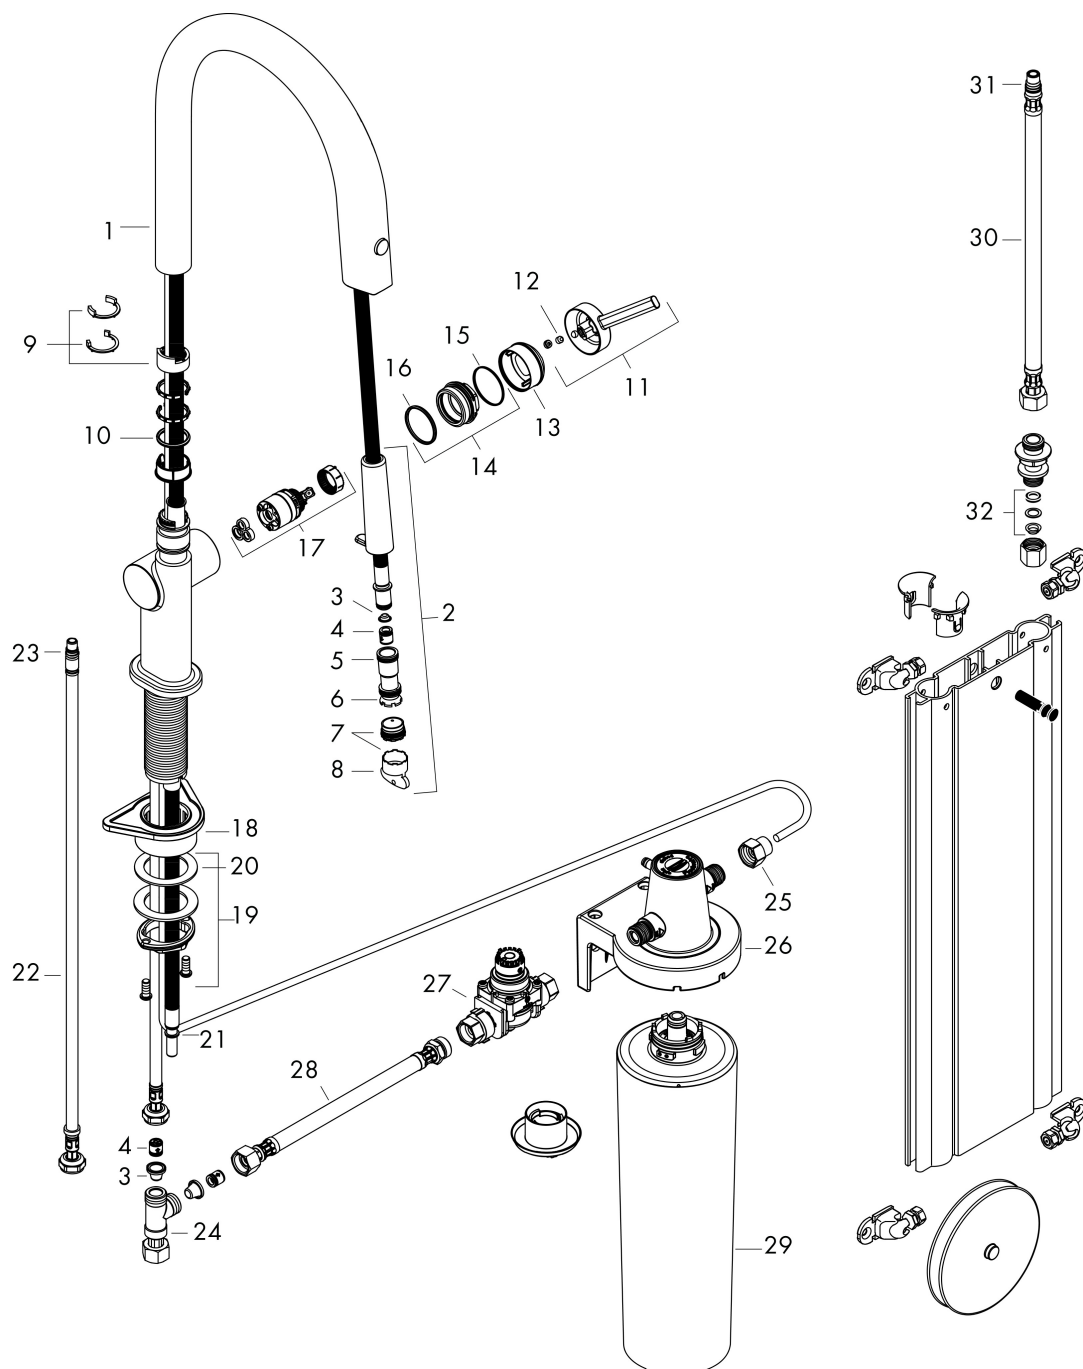

Marke hansgrohe
 Artikelname **Aqittura M91** FilterSystem 210, Ausziehauslauf, 1jet, sBox, Starter Set
 Art.-Nr. 76800670
 Oberfläche Mattschwarz
 Netto Preis 972,10 EUR

Ersatzteilliste für Baujahr: > 03/22

Pos.	Beschreibung	Art.nr.	Preis
1	Auslauf kpl.	94713670	207,50
2	Ausziehbrause	94512000	39,10
3	Schmutzfangsieb	98516000	5,60
4	Rückflußverhinderer DW 10	96456000	8,30
5	O-Ring 13x1,5	98475000	3,20
6	O-Ring 12x2,5	98230000	3,20
7	Strahlformer	93748000	20,50
8	Serviceschlüssel	93750000	8,30
9	Anschlagring Set (110° / 150°)	94513000	49,40
10	O-Ring 21x2,5	98211000	3,20
11	Griff	93736670	47,70
12	Madenschraube M5x5	98446000	3,20
13	Kappe	93737670	47,70
14	Mutter	93738000	39,10
15	O-Ring 29x2	98391000	3,20
16	O-Ring 30x1,5	98433000	3,20
17	Kartusche kpl.	93740000	74,40
18	Befestigungsteil	97523000	5,60
19	Schaftbefestigung kpl. (spezial)	93253000	16,90
20	Gleitring	97548000	3,20
21	Schlauch	93754000	86,40
22	Anschlussschlauch 900 mm M8x0,75 G3/8	93746000	31,80
23	O-Ring 6,6x1,6	93019000	3,20
24	T-Stück	94707000	107,10
25	Adapter Set	94710000	39,10
26	Halteelement	94709000	107,10
27	Druckminderer-Patrone	94708000	138,30
28	Anschlussschlauch 700 mm G3/8 x G3/8	95896000	49,40
29	Filter mit Aktivkohle und Mineralisierung (Harmony)	76828000	137,80
30	Anschlussschlauch 450 mm M10x1 G3/8	96507000	31,80
31	O-Ring 8x1,5	98423000	3,20
32	Quetschverschraubung	96099000	8,30
a	Durchflussmesser	76818000	120,90